




Spectrum Analyzer

RSA306 USB Real Time Spectrum Analyzer Datasheet

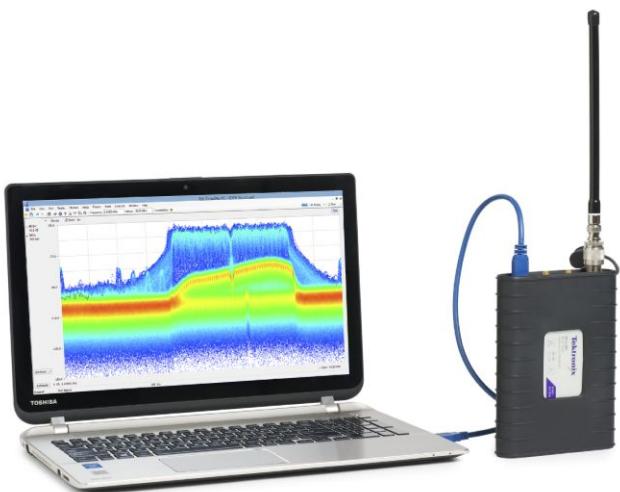

The RSA306 uses your PC and Tektronix SignalVu®-PC RF Signal Analysis Software to provide real time spectrum analysis, streaming capture and deep signal analysis capabilities for signals from 9 kHz to 6.2 GHz, all in a low-cost, highly portable package that is ideal for field, factory, or academic use.

Key performance specifications

- 9 kHz to 6.2 GHz frequency range covers a broad range of analysis needs
- +20 dBm to -160 dBm measurement range
- Captures interference to ensure that you see problems first time, every time
- Mil-Std 28800 Class 2 environmental, shock and vibration specifications for use in harsh conditions

Key features

- Full-featured spectrum analysis capability with included Tektronix SignalVu®-PC software
- 27 spectrum and signal analysis measurements standard
- Options for mapping, modulation analysis, standards support, pulse measurements, and frequency settling
- Real time Spectrum/Spectrogram display to minimize time spent on transient and interference hunting
- Application programming interface (API) included for Microsoft Windows environments
- MATLAB instrument driver for use with Instrument Control Toolbox
- Streaming capture records long-term events

Applications

- Academic/education
- Maintenance, installation and repair in the factory or field
- Value-conscious design and manufacturing
- Interference hunting

The RSA306: a new class of instrument

The RSA306 offers full-featured spectrum analysis and deep signal analysis at a price unmatched by any previous offering. Using the latest in commercial interfaces and available computing power, the RSA306 separates signal acquisition from measurement, dramatically lowering the cost of instrument hardware. Data analysis, storage and replay is performed on your personal computer, tablet or laptop. Managing the PC separately from the acquisition hardware makes processing upgrades easy, and minimizes IT management issues.

SignalVu-PC software and an API for deep analysis and fast programmatic interaction

The RSA306 operates with SignalVu-PC, a powerful program that is the basis of Tektronix performance signal analyzers. SignalVu-PC offers a deep analysis capability previously unavailable in value-priced solutions. Real-time processing of the DPX spectrum/spectrogram is enabled in your PC, further reducing the cost of hardware. Customers who need programmatic access to the instrument can choose either the SignalVu-PC programmatic interface or use the included application programming interface (API) that provides a rich set of commands and measurements. A MATLAB driver for the API is available, enabling operation with MATLAB and the Instrument Control Toolbox.

Measurements included in SignalVu-PC base version

Basic functionality of the free SignalVu-PC program is far from basic. The table below summarizes the measurements included in the free SignalVu-PC software.

General signal analysis	
Spectrum analyzer	Spans from 100 Hz to 6.2 GHz Three traces plus math and spectrogram trace Five markers with power, relative power, integrated power, power density and dBc/Hz functions
DPX Spectrum/Spectrogram	Real time display of spectrum with 100% probability of intercept of 100 μ sec signals in up to 40 MHz span
Amplitude, frequency, phase vs. time, RF I and Q vs. time	Basic vector analysis functions
Time Overview/Navigator	Enables easy setting of acquisition and analysis times for deep analysis in multiple domains
Spectrogram	Analyze and re-analyze your signal with a 2-D or 3-D waterfall display
AM/FM listening	Hear, and record to file, FM and AM signals
Analog modulation analysis	
AM, FM, PM analysis	Measures key AM, FM, PM parameters
RF measurements	
Spurious measurement	User-defined limit lines and regions provide automatic spectrum violation testing across the entire range of the instrument
Spectrum emission mask	User-defined or standards-specific masks
Occupied Bandwidth	Measures 99% power, -x dB down points
Channel Power and ACLR	Variable channel and adjacent/alternate channel parameters
MCPR	Sophisticated, flexible multi-channel power measurements
CCDF	Complementary Cumulative Distribution Function plots the statistical variations in signal level

SignalVu-PC application-specific options


SignalVu-PC offers a wealth of application-oriented measurement and analysis options including:

- General-purpose modulation analysis (27 modulation types including 16/32/64/256 QAM, QPSK, O-QPSK, GMSK, FSK, APSK)
- P25 analysis of phase 1 and phase 2 signals
- WLAN analysis of 802.11a/b/g/j/p, 802.11n, 802.11ac
- Mapping and signal strength
- Pulse analysis
- AM/FM/PM/Direct Audio Measurement including SINAD, THD


See the separate SignalVu-PC datasheet for complete details and ordering information.

The RSA306 with SignalVu-PC offers basic and advanced measurements for field and lab

See what you've never seen before: The 40 MHz real time bandwidth of the RSA306 combined with the processing power of SignalVu-PC shows you every signal, even down to 100 μ s in duration. The following image shows a WLAN transmission (green and orange), and the narrow signals that repeat across the screen are a Bluetooth access probe. The spectrogram (upper part of the screen) clearly separates these signals in time to show any signal collisions.

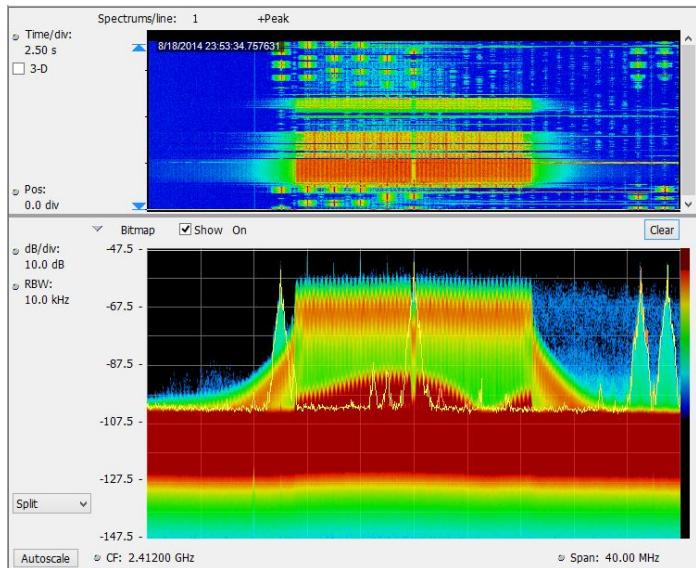


Monitoring has never been easier. Spectrum mask testing captures detail of transients found in the frequency domain, such as intermittent interference. Mask testing can be set to stop acquisition, save acquisition, save a picture, and send an audible alert. The following image shows a spectrum mask (in orange on the spectrum display) created to monitor a band of frequencies for violations. A single transient of 125 μ s duration has occurred that violated the mask, with the violation shown in red. The transient is clearly seen on the spectrogram above the red violation area (circled).

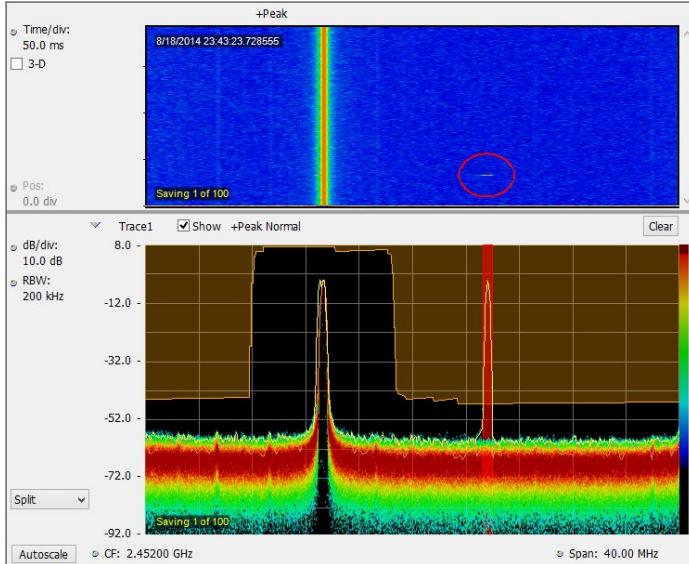


Analysis of AM and FM signals is standard in SignalVu-PC. The following screen shot shows a 1 kHz tone amplitude modulating a carrier to 48.9% total AM. Markers are used on the spectrum display to measure the modulation sideband at 1 kHz offset, 12.28 dB down from the carrier. The same signal is simultaneously viewed in the modulation display, showing AM versus time, with +Peak, -Peak and Total AM measurements.


Advanced measurements for analog audio modulation including SINAD, THD and modulation rate are available in Option SVA.

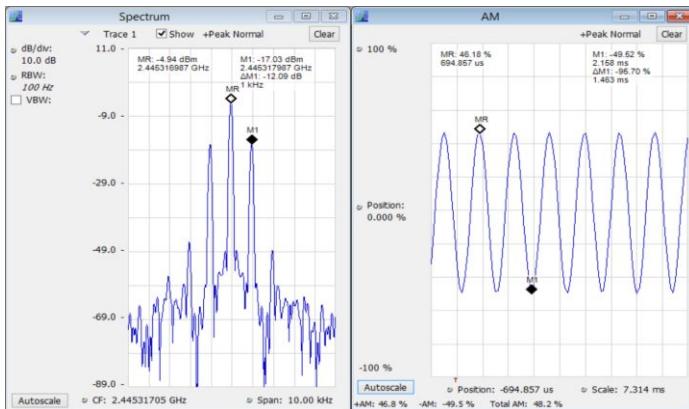


A broad range of analysis options are available on SignalVu-PC. The following screen shot shows the standard Channel Power/ACLR measurement combined with optional modulation analysis to show spectrum measurements plus a constellation display and vector signal quality measurements on a QPSK signal.

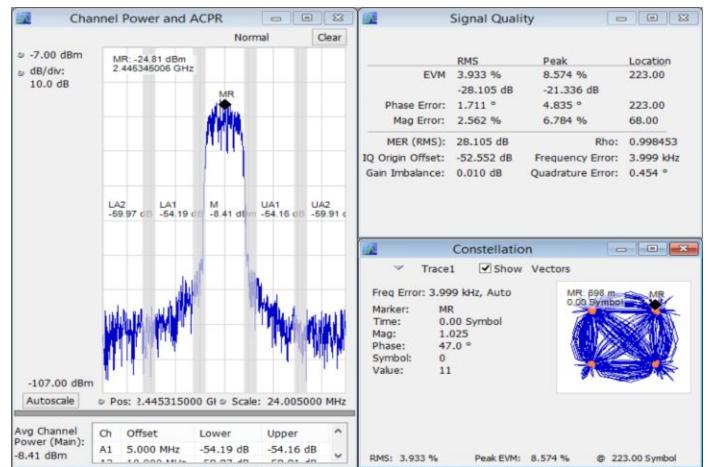


SignalVu-PC Option SV26 enables quick, standards-based transmitter health checks on APCO P25 signals. The following image shows a Phase II signal being monitored for anomalies with the spectrum analyzer while performing transmitter power, modulation and frequency measurements.

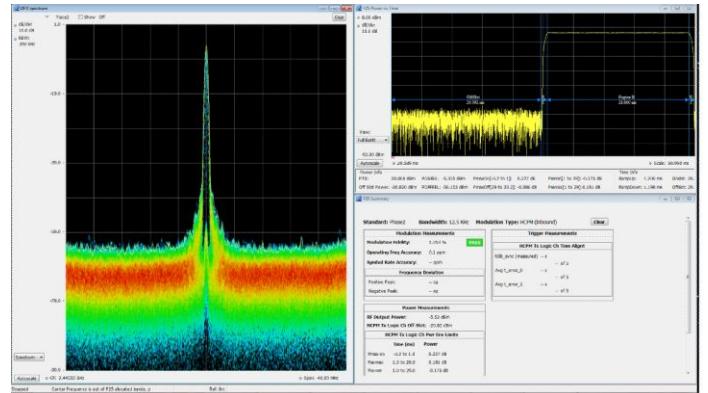

Sophisticated WLAN measurements are easy. On the displayed 802.11g signal, the spectrogram shows the initial pilot sequence followed by the main signal burst. The modulation is automatically detected as 64 QAM for the packet and displayed as a constellation. The data summary indicates an EVM of -33.24 dB RMS, and burst power is measured at 10.35 dBm. SignalVu-PC options are available for 802.11a/b/j/g/p, 802.11n and 802.11ac to 40 MHz bandwidth.

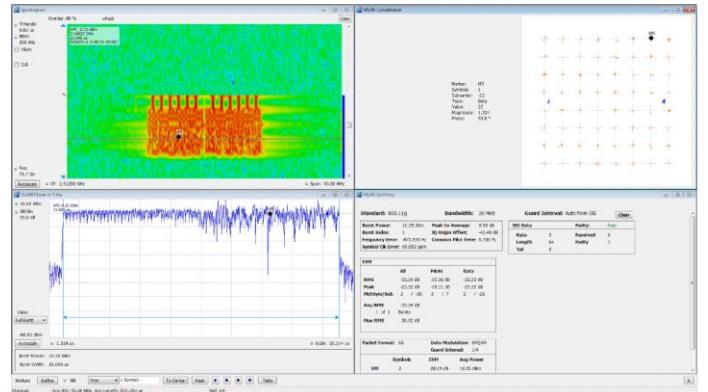

SignalVu-PC Option MAP enables interference hunting and signal strength analysis. Locate interference with azimuth direction function. It lets you draw a line or an arrow on a mapped measurement to indicate the direction your antenna was pointing when you take a measurement. You can also create and display measurement labels.

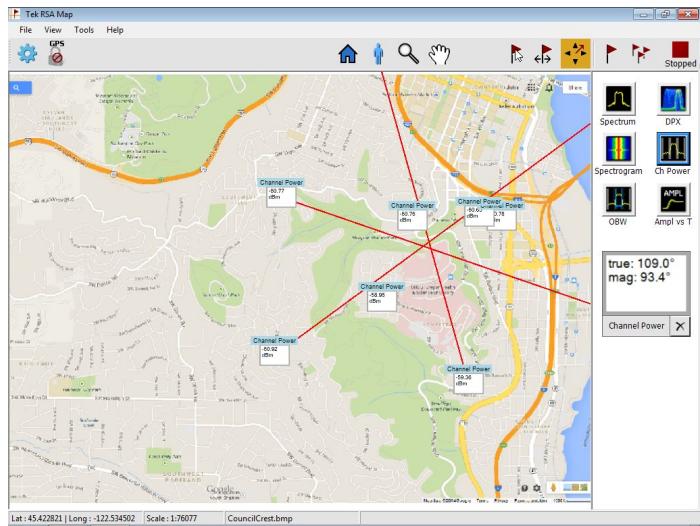

Specifications

Specifications are valid within the following conditions:

- Operate the instrument in an environment that meets the temperature, altitude, and humidity characteristics listed in these specifications.
- Warm up time is 30 minutes after connecting to the PC and starting the SignalVu application.

Frequency

RF input frequency range 9 kHz to 6.2 GHz

Frequency reference accuracy

Initial ± 3 ppm (18 to 28 °C ambient, after 20 minute warm up, + aging)

Aging (typical) ± 3 ppm (1st year), ± 1 ppm/year thereafter

Over operating temperature range (typical) ± 25 ppm + aging

External frequency reference input

Input frequency range 10 MHz ± 10 Hz

Input level range -10 dBm to +10 dBm sinusoid

Impedance 50 Ω

Center frequency resolution

Block IQ samples 1 Hz

Streamed ADC samples 500 kHz

Amplitude

RF input impedance	50 Ω												
RF input VSWR	≤ 1.8:1 (10 MHz to 6200 MHz, reference level ≥ +10 dBm, typical)												
Maximum RF input level without damage													
DC voltage	±40 V _{DC}												
Reference level ≥ -10 dBm	+23 dBm (continuous or peak)												
Reference level < -10 dBm	+15 dBm (continuous or peak)												
Maximum RF input operating level													
Center frequency < 22 MHz (low-frequency path)	+15 dBm												
Center frequency ≥ 22 MHz (RF path)	+20 dBm												
Amplitude accuracy at all center frequencies	<table border="1"> <thead> <tr> <th>Center frequency</th> <th>Warranted (18 °C to 28 °C)</th> <th>Typical (95% confidence) (18 °C to 28 °C)</th> <th>Typical (-10 °C to 55 °C)</th> </tr> </thead> <tbody> <tr> <td>9 kHz - < 3 GHz</td> <td>±2.0 dB</td> <td>±1.25 dB</td> <td>±3 dB</td> </tr> <tr> <td>≥ 3 GHz - 6.2 GHz</td> <td>±2.75 dB</td> <td>±2.0 dB</td> <td>±3 dB</td> </tr> </tbody> </table>	Center frequency	Warranted (18 °C to 28 °C)	Typical (95% confidence) (18 °C to 28 °C)	Typical (-10 °C to 55 °C)	9 kHz - < 3 GHz	±2.0 dB	±1.25 dB	±3 dB	≥ 3 GHz - 6.2 GHz	±2.75 dB	±2.0 dB	±3 dB
Center frequency	Warranted (18 °C to 28 °C)	Typical (95% confidence) (18 °C to 28 °C)	Typical (-10 °C to 55 °C)										
9 kHz - < 3 GHz	±2.0 dB	±1.25 dB	±3 dB										
≥ 3 GHz - 6.2 GHz	±2.75 dB	±2.0 dB	±3 dB										
Reference level +20 dBm to -30 dBm, alignment run prior to testing.													
Applies to corrected IQ data, with signal to noise ratios > 40 dB.													
Accuracy may degrade up to ±0.6 dB after storage at maximum storage temperature, recovers within 24 hours													

Intermediate frequency and acquisition system

IF bandwidth	40 MHz
ADC sample rate and bit width	112 Ms/s, 14 bits
Real-time IF acquisition data (uncorrected)	<p>112 Ms/s, 16-bit integer real samples</p> <p>40 MHz BW, 28 ±0.25 MHz Digital IF, uncorrected. Corrected values are stored with saved files</p> <p>Block streaming data at an average rate of 224 MB/s</p>
Block baseband acquisition data (corrected)	
Sample rates	≤ 56 / (2 ^N) Ms/s, 32-bit float complex samples, N ≥ 0
Bandwidths	≤ 40 / (2 ^N) MHz, 0 Hz Digital IF, where N = the decimation value applied to data to achieve desired acquisition bandwidth
Channel amplitude flatness	<p>±1.0 dB, 18 °C to 28 °C</p> <p>±2.0 dB, -10 °C to 55 °C, typical</p> <p>Reference level +10 dBm to -30 dBm, alignment run before testing</p> <p>Applies to corrected IQ data, with signal to noise ratios > 40 dB</p>

RSA306 USB Spectrum Analyzer

Trigger

Trigger/sync input

Voltage range	TTL, 0.0 V – 5.0 V
Trigger level, positive-going threshold voltage	1.6 V minimum; 2.1 V maximum
Trigger level, negative-going threshold voltage	1.0 V minimum; 1.35 V maximum
Impedance	10 kΩ

IF power trigger

Threshold range	0 dB to -50 dB from Reference Level, for trigger levels > 30 dB above the noise floor, 1 dB steps
Type	Rising or falling edge

Noise and distortion

Displayed Average Noise Level (DANL)

Reference level = -50 dBm, input terminated with 50 Ω load, log-average detection (10 averages)

Center frequency	Frequency range	DANL (dBm/Hz)	DANL (dBm/Hz), typical
< 22 MHz (LF path)	100 kHz - 42 MHz	-130	-133
≥ 22 MHz (RF path)	2 MHz - 5 MHz	-145	-148
	> 5 MHz - 1.0 GHz	-160	-163
	> 1.0 GHz - 2.0 GHz	-158	-161
	> 2.0 GHz - 4.0 GHz	-155	-158
	> 4.0 GHz - 6.2 GHz	-150	-153

Phase noise

Phase noise measured with 1 GHz CW signal at 0 dBm

The following table entries are in dBc/Hz units

Offset	Center frequency				
	1 GHz	10 MHz (typical)	1 GHz (typical)	2.5 GHz (typical)	6 GHz (typical)
1 kHz	-80	-108	-88	-75	-70
10 kHz	-84	-118	-87	-80	-75
100 kHz	-90	-120	-92	-90	-85
1 MHz	-110	-122	-120	-110	-105

Residual spurious response

< -85 dBm (Reference level ≤ -50 dBm, RF input terminated with 50 Ω)

Exceptions: < -78 dBm: Harmonics of 112 MHz in the range 1680-2688 MHz; 4750, 4905-4965 MHz

Input related spurious response (SFDR)

< -50 dBc (with auto settings on and signals 10 dB below reference level of -30 dBm)

Exceptions, typical:

IF feedthrough: ≤ -30 dBc for 2340 MHz - 2420 MHz

Image: ≤ -30 dBc for 4570 MHz - 4760 MHz

RFx2LO: ≤ -40 dBc for 1850-1960, 3700-3880 MHz; -45 dBc for 3890 – 3910 MHz

2RFx2LO: ≤ -45 dBc for 2140, 4270 MHz

Residual FM

< 10 Hz_{P-P} (95% confidence)

Noise and distortion

3RD order IM distortion	Two input CW signals, 1 MHz separation, each input signal level 5 dB below the reference level setting at the RF input Reference level at -15 dBm disables Preamp; reference level at -30 dBm enables Preamp
Center frequency 2130 MHz	≤ -60 dBc at reference level -15 dBm (≤ -60 dBc at reference level -30 dBm, typical)
40 MHz to 6.2 GHz, typical	< -58 dBc at reference level = -10 dBm < -50 dBc at reference level = -50 dBm
3RD order intercept (TOI)	
Center frequency 2130 MHz	≥ +10 dBm at reference level -15 dBm (≥ -5 dBm at reference level -30 dBm, typical)
40 MHz to 6.2 GHz, typical	+14 dBm at reference level -10 dBm -30 dBm at reference level -50 dBm
2ND harmonic distortion, typical	< -55 dBc, 10 MHz to 300 MHz, reference level = 0 dBm < -60 dBc, 300 MHz to 3.1 GHz, reference level = 0 dBm < -50 dBc, 10 MHz to 3.1 GHz, reference level = -40 dBm Exception: < -45 dBc in the range 1850-2330 MHz
2ND harmonic intercept (SHI)	+55 dBm, 10 MHz to 300 MHz, reference level = 0 dBm +60 dBm, 300 MHz to 3.1 GHz, reference level = 0 dBm +10 dBm, 10 MHz to 3.1 GHz, reference level = -40 dBm Exception: < +5 dBm in the range 1850-2330 MHz
Local oscillator feedthrough to input connector	< -75 dBm at reference level = -30 dBm

Audio Output

Audio output (from SignalVu-PC or application programming interface)

Types	AM, FM
IF bandwidth range	Five selections, 8 kHz – 200 kHz
Audio output frequency range	50 Hz – 10 kHz
PC audio output	16 bits at 32 ks/s
Audio file output format	.wav format, 16 bit, 32 ks/s

RSA306 USB Spectrum Analyzer

SignalVu-PC base performance summary

Selected SignalVu-PC features when used with the RSA306. See the SignalVu-PC datasheet for more information on the application features.

SignalVu-PC/RSA306 key characteristics

Maximum span	40 MHz real-time
	9 kHz - 6.2 GHz swept
Maximum acquisition time	1.0 s
Minimum IQ resolution	17.9 ns (acquisition BW = 40 MHz)

Spectrum display

Traces	Three traces + 1 math trace + 1 trace from spectrogram for spectrum display
Trace functions	Normal, Average (VRMS), Max Hold, Min Hold, Average of Logs
Detector	Average (VRMS), Average, CISPR peak, +Peak, -Peak, Sample
Spectrum trace length	801, 2401, 4001, 8001, 10401, 16001, 32001, and 64001 points
RBW range	10 Hz to 10 MHz

Spectrum sweep rates vs. resolution bandwidth

Sweep Time, RBW= Auto	1700 MHz/s tuning rate
	After application preset: Spectrum Analysis
Sweep Time, RBW= 10 kHz	1400 MHz/s tuning rate
	After application preset: Spectrum Analysis

DPX spectrum display

Spectrum processing rate (RBW = auto, trace length 801)	10,000/s
DPX bitmap resolution	201x801
Marker information	Amplitude, frequency, signal density
Minimum signal duration for 100% probability of detection	100 μ s
	Span: 40 MHz, RBW = Auto, Max-hold on
	Due to the non-deterministic execution time of programs running under the Microsoft Windows OS, this specification may not be met when the host PC is heavily loaded with other processing tasks
Span range (continuous processing)	1 kHz to 40 MHz
Span range (swept)	Up to maximum frequency range of instrument
Dwell time per step	50 ms to 100 s
Trace processing	Color-graded bitmap, +Peak, -Peak, average
Trace length	801, 2401, 4001, 10401
RBW range	1 kHz to 10 MHz

DPX Spectrogram display

Trace detection	+Peak, -Peak, Average(V _{RMS})
Trace length, memory depth	801 (60,000 traces)
	2401 (20,000 traces)
	4001 (12,000 traces)

Time resolution per line 50 ms to 6400 s, user selectable

SignalVu-PC base performance summary

Analog modulation analysis (standard)

AM demodulation accuracy, typical	$\pm 2\%$ 0 dBm input at center, carrier frequency 1 GHz, 1kHz/5kHz input/modulated frequency, 10% to 60% modulation depth 0 dBm input power level, reference level = 10 dBm
FM demodulation accuracy, typical	$\pm 3\%$ 0 dBm input at center, carrier frequency 1 GHz, 400Hz/1kHz input/modulated frequency 0 dBm input power level, reference level = 10 dBm
PM demodulation accuracy, typical	$\pm 1\%$ of measurement bandwidth 0 dBm input at center, carrier frequency 1 GHz, 1kHz/5kHz input/modulated frequency 0 dBm input power level, reference level = 10 dBm

SignalVu-PC options

AM/FM/PM and direct audio measurement (Option SVA)

Carrier frequency range (for modulation and audio measurements)	(1/2 \times audio analysis bandwidth) to maximum input frequency
Maximum audio frequency span	10 MHz
FM measurements (Mod. index >0.1)	Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise
AM measurements	Carrier Power, Audio Frequency, Modulation Depth (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise
PM measurements	Carrier Power, Carrier Frequency Error, Audio Frequency, Deviation (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation Distortion, S/N, Total Harmonic Distortion, Total Non-harmonic Distortion, Hum and Noise
Direct audio measurements	Signal power, Audio frequency (+Peak, -Peak, Peak-Peak/2, RMS), SINAD, Modulation distortion, S/N, Total harmonic distortion, Total non-harmonic distortion, Hum and Noise
Audio filters	Low pass: 0.3, 3, 15, 30, 80, 300, and user-entered up to 0.9 \times audio bandwidth High pass: 20, 50, 300, 400, and user-entered up to 0.9 \times audio bandwidth Standard: CCITT, C-Message De-emphasis (μs): 25, 50, 75, 750, and user-entered File: User-supplied .TXT or .CSV file of amplitude/frequency pairs. Maximum 1000 pairs

Pulse measurements (Option SVP)

Measurements (nominal)	Average On Power, Peak Power, Average Transmitted Power, Pulse Width, Rise Time, Fall Time, Repetition Interval(seconds), Repetition Interval (Hz), Duty Factor (%), Duty Factor (ratio), Ripple, Droop, Pulse-Pulse Frequency Difference, Pulse-Pulse Phase Difference, RMS Frequency Error, Max Frequency Error, RMS Phase Error, Max Phase Error, Frequency Deviation, Phase Deviation, Time Stamp, Delta Frequency, Impulse Response, Overshoot
Minimum pulse width for detection	150 ns
Average ON power at 18 °C to 28 °C, typical	± 1.0 dB + absolute amplitude accuracy For pulses of 300 ns width or greater, duty cycles of .5 to .001, and S/N ratio ≥ 30 dB
Duty factor, typical	$\pm 0.2\%$ of reading For pulses of 450 ns width or greater, duty cycles of .5 to .001, and S/N ratio ≥ 30 dB
Average transmitted power, typical	± 1.0 dB + absolute amplitude accuracy For pulses of 300 ns width or greater, duty cycles of .5 to .001, and S/N ratio ≥ 30 dB

RSA306 USB Spectrum Analyzer

SignalVu-PC options

Peak pulse power, typical	± 1.5 dB + absolute amplitude accuracy For pulses of 300 ns width or greater, duty cycles of .5 to .001, and S/N ratio ≥ 30 dB
Pulse width, typical	$\pm 0.25\%$ of reading For pulses of 450 ns width or greater, duty cycles of .5 to .001, and S/N ratio ≥ 30 dB
General purpose digital modulation analysis (Option SVM)	
Modulation formats	BPSK, QPSK, 8PSK, 16QAM, 32QAM, 64QAM, 128QAM, 256QAM, PI/2DBPSK, DQPSK, PI/4DQPSK, D8PSK, D16PSK, SBPSK, OQPSK, SOQPSK, 16-APSK, 32-APSK, MSK, GFSK, CPM, 2FSK, 4FSK, 8FSK, 16FSK, C4FM
Analysis period	Up to 81,000 samples
Measurement filter	Root Raised Cosine, Raised Cosine, Gaussian, Rectangular, IS-95 TX_MEA, IS-95 Base TXEQ_MEA, None
Reference Filter	Gaussian, Raised Cosine, Rectangular, IS-95 REF, None
Filter rolloff factor	α : 0.001 to 1, in 0.001 steps
Measurements	Constellation, Demod I&Q vs. Time, Error Vector Magnitude (EVM) vs. Time, Eye Diagram, Frequency Deviation vs. Time, Magnitude Error vs. Time, Phase Error vs. Time, Signal Quality, Symbol Table, Trellis Diagram
Symbol rate range	1 k symbols/s to 40 M symbols/s
Adaptive equalizer	Modulated signal must be contained entirely within the acquisition bandwidth
QPSK Residual EVM (center frequency = 2 GHz), typical	Linear, Decision-Directed, Feed-Forward (FIR) equalizer with coefficient adaptation and adjustable convergence rate. Supports modulation types BPSK, QPSK, OQPSK, $\pi/2$ -DBPSK, $\pi/4$ -DQPSK, 8-PSK, 8-DPSK, 16-DPSK, 16/32/64/128/256-QAM, 16/32-APSK 1.1 % (100 kHz symbol rate) 1.1 % (1 MHz symbol rate) 1.2 % (10 MHz symbol rate) 2.5 % (30 MHz symbol rate)
256 QAM Residual EVM (center frequency = 2 GHz), typical	400 symbols measurement length, 20 Averages, normalization reference = maximum symbol magnitude 0.8 % (10 MHz symbol rate) 1.5 % (30 MHz symbol rate) 400 symbols measurement length, 20 Averages, normalization reference = maximum symbol magnitude
WLAN Measurements, 802.11a/b/g/j/p (Option SV23)	
Measurements	WLAN power vs. time; WLAN symbol table; WLAN constellation; spectrum emission mask; error vector magnitude (EVM) vs. symbol (or time), vs subcarrier (or frequency); mag error vs symbol (or time), vs. subcarrier (or frequency); phase error vs symbol (or time), vs. subcarrier (or frequency); channel frequency response vs. symbol (or time), vs. subcarrier (or frequency); spectral flatness vs. symbol (or time), vs. subcarrier (or frequency)
Residual EVM - 802.11a/g/j/p (OFDM), 64-QAM, typical	2.4 GHz, 20 MHz BW: -38 dB 5.8 GHz, 20 MHz BW: -38 dB Input signal level optimized for best EVM, average of 20 bursts, ≥ 16 symbols each
Residual EVM - 802.11b, CCK-11, typical	2.4 GHz, 11 Mbps: 2.0 % Input signal level optimized for best EVM, average of 1,000 chips, BT = .61

SignalVu-PC options

WLAN Measurements 802.11n (Option SV24)

Measurements	WLAN power vs. time; WLAN symbol table; WLAN constellation; spectrum emission mask; error vector magnitude (EVM) vs. symbol (or time), vs subcarrier (or frequency); mag error vs symbol (or time), vs. subcarrier (or frequency); phase error vs symbol (or time), vs. subcarrier (or frequency); channel frequency response vs. symbol (or time), vs. subcarrier (or frequency); spectral flatness vs. symbol (or time), vs. subcarrier (or frequency)
EVM performance - 802.11n, 64-QAM, typical	2.4 GHz, 40 MHz BW: -35 dB 5.8 GHz, 40 MHz BW: -35 dB
	Input signal level optimized for best EVM, average of 20 bursts, ≥ 16 symbols each

WLAN Measurements 802.11ac (Option SV25)

Measurements	WLAN power vs. time; WLAN symbol table; WLAN constellation; spectrum emission mask; error vector magnitude (EVM) vs. symbol (or time), vs subcarrier (or frequency); mag error vs symbol (or time), vs. subcarrier (or frequency); phase error vs symbol (or time), vs. subcarrier (or frequency); channel frequency response vs. symbol (or time), vs. subcarrier (or frequency); spectral flatness vs. symbol (or time), vs. subcarrier (or frequency)
EVM performance - 802.11ac, 256-QAM, typical	5.8 GHz, 40 MHz BW : -35 dB

APCO P25 Measurements (Option SV26)

Measurements	RF output power, operating frequency accuracy, modulation emission spectrum, unwanted emissions spurious, adjacent channel power ratio, frequency deviation, modulation fidelity, frequency error, eye diagram, symbol table, symbol rate accuracy, transmitter power and encoder attack time, transmitter throughput delay, frequency deviation vs. time, power vs. time, transient frequency behavior, HCPM transmitter logical channel peak adjacent channel power ratio, HCPM transmitter logical channel off slot power, HCPM transmitter logical channel power envelope, HCPM transmitter logical channel time alignment, cross-correlated markers
Modulation fidelity, typical	C4FM = 1.3% HCPM = 0.8% HDQPSK = 2.5%
	Input signal level is optimized for best modulation fidelity.

Mapping

Supported map types	Pitney Bowes MapInfo (*.mif), Bitmap (*.bmp)
Saved measurement results	Measurement data files (exported results)
Map file used for the measurements	Google Earth KMZ file
Recallable results files (trace and setup files)	MapInfo-compatible MIF/MID files

RF signal strength

Signal strength indicator	Located at right side of display
Measurement bandwidth	Up to 40 MHz, dependent on span and RBW setting
Tone type	Variable frequency based on received signal strength

RSA306 USB Spectrum Analyzer

Inputs, outputs, interfaces

RF input	Type N, female
External frequency reference input	SMA, female
Trigger/sync input	SMA, female
Status indicator	LED, dual color red/green
USB device port	USB 3.0 - Micro-B

Physical characteristics

Dimensions	
Height	30.5 mm (1.2 in)
Width	190.5 mm (7.5 in)
Depth	127 mm (5 in)
Weight	0.59 kg (1.3 lbs)

Regulatory

Safety	UL61010-1, CAN/CSA-22.2 No.61010-1, EN61010-1, IEC61010-1
Regional certifications	Europe: EN61326 Australia/New Zealand: AS/NZS 2064
EMC emissions	EN61000-3-2, EN61000-3-3, EN61326-2-1
EMC immunity	EN61326-1/2, IEC61000-4-2/3/4/5/6/8/11

Environmental performance

Temperature	
Operating	-10 °C to +55 °C (+14 °F to +131 °F)
Nonoperating	-51 °C to +71 °C (-60 °F to +160 °F)
Humidity (operating)	5% to 75% ±5% relative humidity (RH) from +30 °C to +40 °C (+86 °F to 104 °F) 5% to 45% RH above +40 °C to +55 °C (+86 °F to +131 °F)
Altitude	
Operating	Up to 9,144 meters (30,000 feet)
Nonoperating	15,240 meters (50,000 feet)
Dynamics	
Random vibration, nonoperating	0.030 g ^{2/Hz} , 10-500 Hz, 30 minutes per axis, three axes (90 minutes total)
Mechanical shock, operating	Half-sine mechanical shocks, 30 g peak amplitude, 11 µs duration, three drops in each direction of each axis (18 total)

Environmental performance

Handling and transit

Bench handling, operating	Per MIL-PRF-28800F Class 2 operating: Rotational-edge-drops of appropriate edges on appropriate sides of the equipment
Transit drop, nonoperating	Per MIL-PRF-28800F Class 2 nonoperating: Transit drops onto six faces and four corners of the equipment, from a height of 30 cm (11.8 in.) for a total of 10 impacts

Ordering information

Models

RSA306

USB real time spectrum analyzer, 9 kHz - 6.2 GHz, 40 MHz acquisition bandwidth, one-year warranty

A USB 3.0 PC is required for operation of the RSA306. For full performance of the real time features of the RSA306, an Intel i7 4th generation quad-core processor and 8 GB RAM is required. Processors of lower performance can be used, with reduced real time performance. Storage of streaming data requires that the PC be equipped with a drive capable of streaming storage rates of 300 MB/sec.

Standard accessories

174-6584-xx

USB 3.0 cable (1 M)

063-4543-xx

SignalVu-PC software, documentation, USB key

071-3323-xx

Printed safety/installation manual (English)

Warranty

Warranty

1 year

SignalVu-PC application-specific options

The base software is free, included with the instrument, and is also available to download from www.tek.com. Option keys are sent by email which you then enter into the application. The following options add functionality and value to your measurement solution.

Option SVA

AM/FM/PM/Direct Audio Analysis

Option SVT

Settling Time (frequency and phase) measurement

Option SVM

General purpose modulation analysis

Option SVP

Advanced Signal Analysis (including pulse measurements)

Option SVO

Flexible OFDM Analysis

Option SV23

WLAN 802.11a/b/g/j/p measurement application

Option SV24

WLAN 802.11n measurement application (requires option SV23)

Option SV25

WLAN 802.11ac measurement application (requires option SV24). Limited to 40 MHz bandwidth on RSA306

Option SV26

APCO P25 measurement application

Option MAP

Mapping and signal strength

Option CON

SignalVu-PC live link to the MDO4000B series mixed-domain oscilloscopes

Option SIGNALVU-PC-SVE SV2C

Live Link to MDO4000B and WLAN 802.11a/b/g/j/p/n/ac measurements (includes options CON, SV23, SV24 and SV25)

Service options

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D1	Calibration Data Report
Opt. D3	Calibration Data Report 3 Years (with Opt. C3)
Opt. D5	Calibration Data Report 5 Years (with Opt. C5)
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)

Recommended accessories

RSA300CASE	Soft case with shoulder-strap
RSA300TRANSIT	Hard-sided transit case for RSA300 with room for USB cable and small accessories. Pelican model Stormcase iM2100
RSA306RACK	Rackmount with slots for two RSA306. 19 inch rack with cover for unused slot
119-6609-xx	BNC whip antenna
103-0045-xx	N-BNC adapter
119-6594-xx	Beam antenna, 824 MHz to 896 MHz
119-6595-xx	Beam antenna, 896 MHz to 960 MHz
119-6596-xx	Beam antenna, 1710 MHz to 1880 MHz
119-6597-xx	Beam antenna, 1850 MHz to 1990 MHz
119-6970-xx	Magnetic mount antenna, 824 MHz to 2170 MHz (requires adapter 103-0449-00)
119-7246-xx	Pre-filter, general purpose, 824 MHz to 2500 MHz, Type-N (f) connector
119-7426-xx	Pre-filter, general purpose, 2400 MHz to 6200 MHz, Type-N (f) connector
012-0482-xx	Cable, 50 Ω, BNC (m) 3 foot (91 cm)
174-4977-xx	Cable, 50 Ω, straight Type-N (m) and angled Type-N (m) connector, 1.6 foot (50 cm)
174-5002-xx	Cable, 50 Ω, Type-N (m) to Type-N (m) connector, 3 foot (91 cm)
119-4146-xx	EMCO E/H-field probes
10 dB 2W pad, SMA M-F	Available from Pasternack http://www.pasternack.com/10db-fixed-sma-male-sma-female-2-watts-attenuator-pe7045-10-p.aspx
E/H field probes, lower cost alternative	Available from Beehive www. http://beehive-electronics.com/



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

RSA306 USB Spectrum Analyzer

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3010
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea 001 800 8255 2835
Spain 00800 2255 4835*
Taiwan 886 (2) 2722 9622

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 April 2013

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

03 Oct 2014



37W-30767-0

www.tektronix.com

Tektronix®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tektronix:](#)

[RSA306](#)