


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

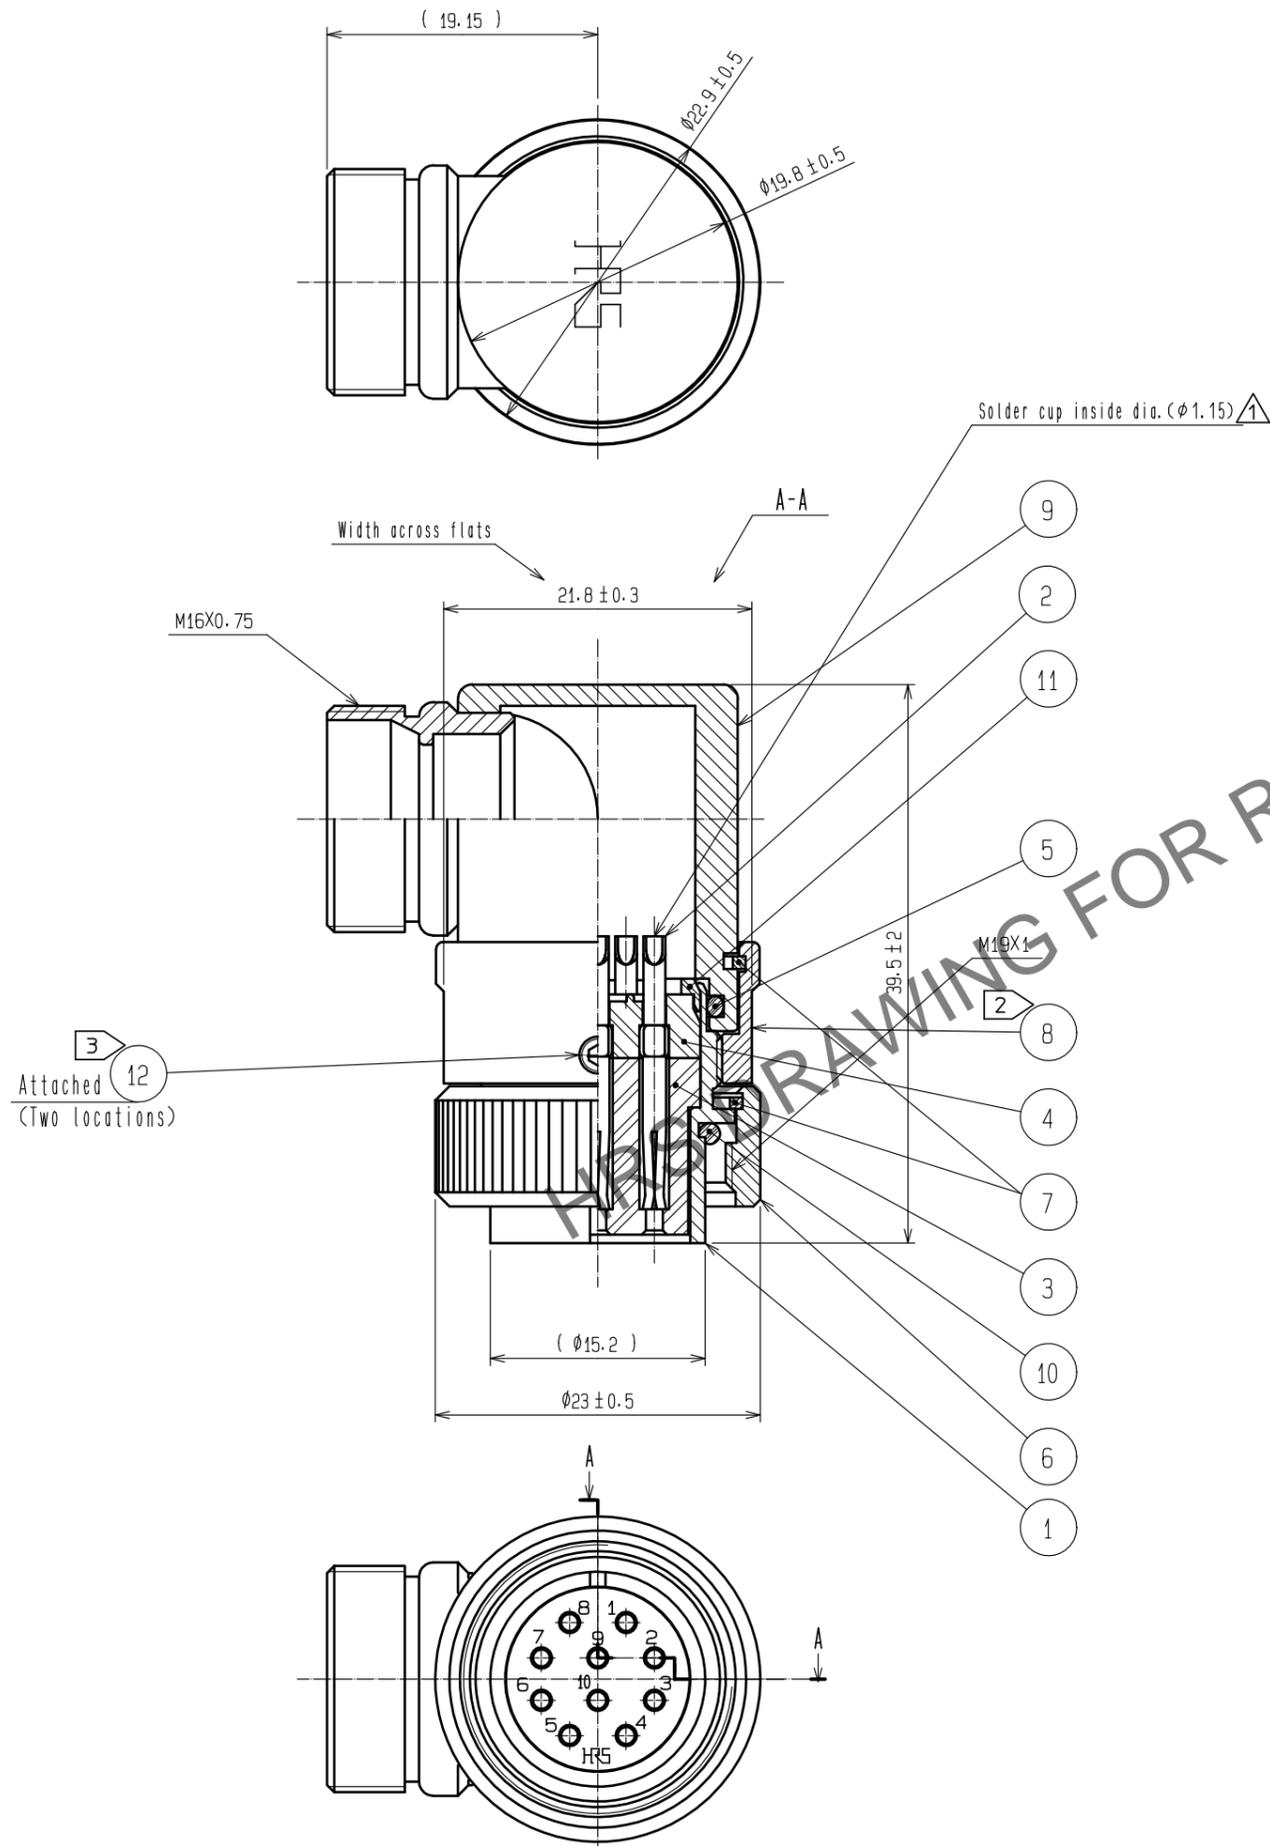

- Notes
- 1 Rotation example of Ref. No. ①, ⑧ and ⑨ are shown.
 - 2 The tightening torque of Ref. No. ⑧: 3 to 4 N·m.
 - 3 The tightening torque of Ref. No. ⑫: 0.2 to 0.3 N·m.
 Across flats hexagon head of Ref. No. ⑫: 1.27
 Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑫ in order to prevent loosening.
 - 4 This product to be used with cable clamp, JR13WCC-※(72).
 ※ designate diameter of applicable cable.
 - 5 The cable pull and twisting strength, waterproof tightness and other characteristics may differ, depending on the cable structure, please confirm before the use.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
6	Brass	Nickel plating	12	Stainless steel	Hexagon socket set screw M2.6X0.45X2
5	Acrylonitrile-butadiene rubber	(Gray)	11	Polyacetal	(White)
4	Polyphenylene sulfide	(Black)	10	Acrylonitrile-butadiene rubber	(Gray)
3	Polyphenylene sulfide	(Black)	9	Brass	Nickel plating
2	Copper alloy	Silver plating 5μm min.	8	Brass	Nickel plating
1	Brass	Nickel plating	7	Phosphor bronze	Nickel plating

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	1	DIS-C-00015649	HT. ZENBA	HY. KOBAYASHI	20230626
APPROVED : HY. KOBAYASHI			20230120	DRAWING NO. EDC-113483-81-00		
CHECKED : HY. KOBAYASHI			20230120	PART NO. RM15WTL P-10S(81)		
DESIGNED : HT. ZENBA			20230120	CODE NO. CL0109-0999-4-81		
DRAWN : KR. SUZUKI			20230118	1/1		