


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

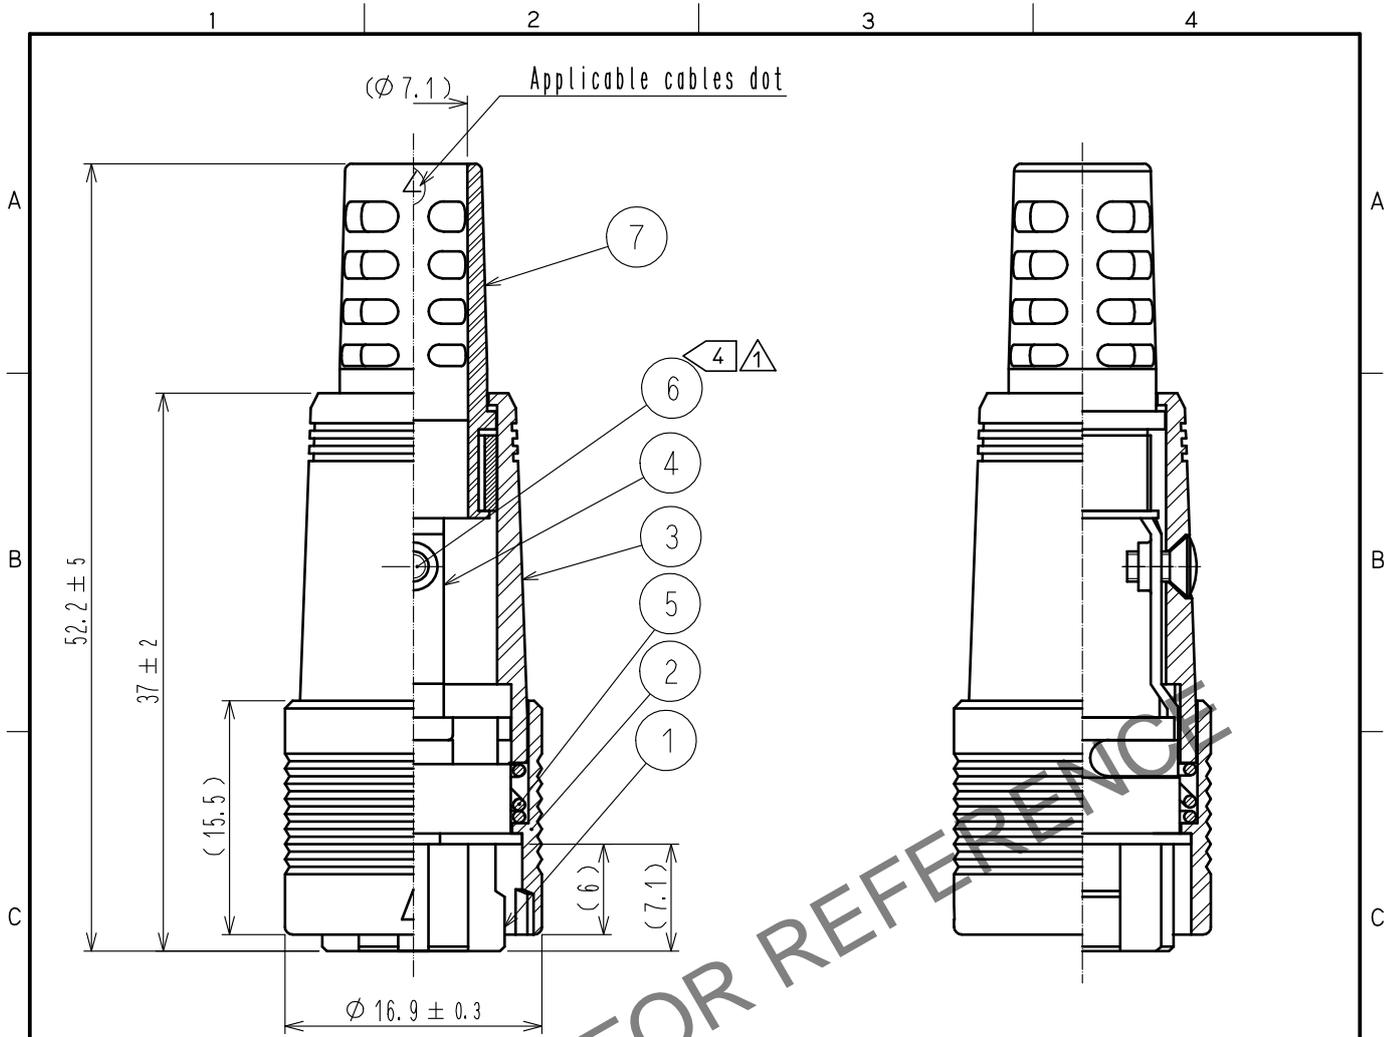

HRS DRAWING FOR REFERENCE

- Notes
- ① 1 Applicable crimp contact:
 Contact No. 1 to 11
 RP13A-SC-222/CL113-0151-0
 (Applicable cable size : AWG#24 to #28.
 Cable jacket outer diameter shall be ϕ 1.4mm or less.)
 Contact No. 12, 13
 RP13A-SC-212/CL113-0150-8
 (Applicable cable size : AWG#18 to #22.
 Cable jacket outer diameter shall be ϕ 1.9mm or less.)
 - ② 2 Applicable cable crimping tool : RP13A-TC-01/CL150-0070-0
 - 3 Extraction tool : RP13A-SC-TP/CL150-0022-8
 - ④ 4 The tightening torque of Ref No. ⑥ : 0.15 to 0.2 N·m.
 To prevent loosening Ref No. ⑥, use LOCTITE 243,
 HENKEL JAPAN or equivalent.
 - 5 Shall be disassembled when delivered.
 - ⑥ 6 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure, please confirm before the use.

4	Brass			7	Polyvinylchloride	(Black)
3	Pplycarbonate	(Black)	UL94V-0			
2	Pplycarbonate	(Black)	UL94V-0	6	Brass	Black chromete treatment (Trivalent chromium) JIS B 1111 M2X0.4X4
1	Pplycarbonate	(Black)	UL94V-0	5	Steel	Nickel plating
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ① 5	DESCRIPTION OF REVISIONS DIS-C-00009810	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20220215
-------------	--	----------------	--------------	--	------------------------	--------------------------	------------------

HIROSE ELECTRIC CO., LTD.	APPROVED :MR. YOSHIDA	20050105	DRAWING NO.	EDC-028082-71-71	
	CHECKED :MO. SATOH	20050105	PART NO.	RP13A-12PK-13SC(71)	
	DESIGNED :YH. YAMADA	20050105	CODE NO.	CL0113-1006-7-71	① 1
	DRAWN :YH. YAMADA	20050105			