
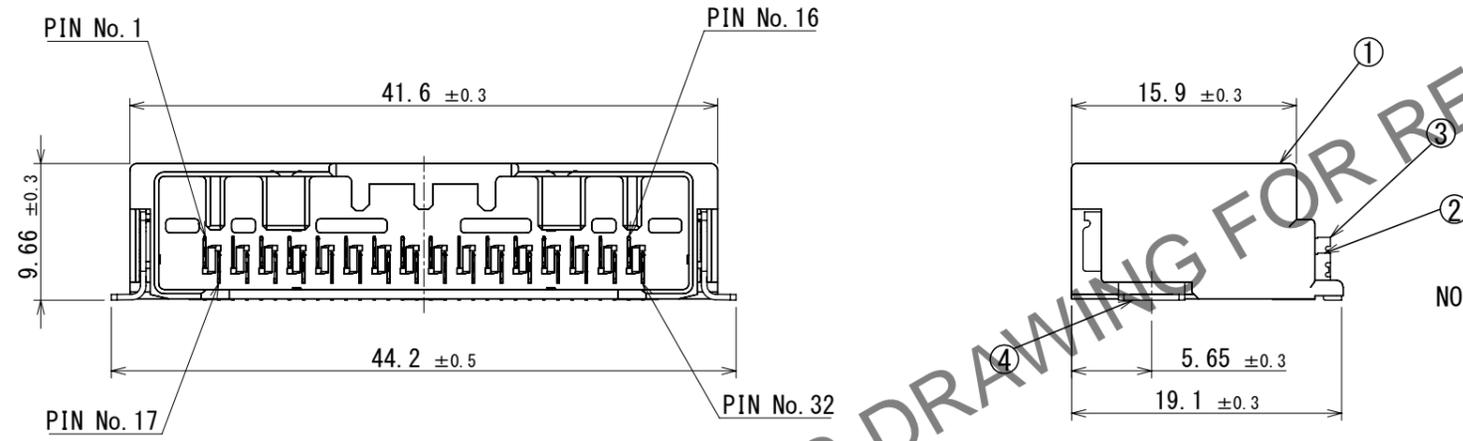
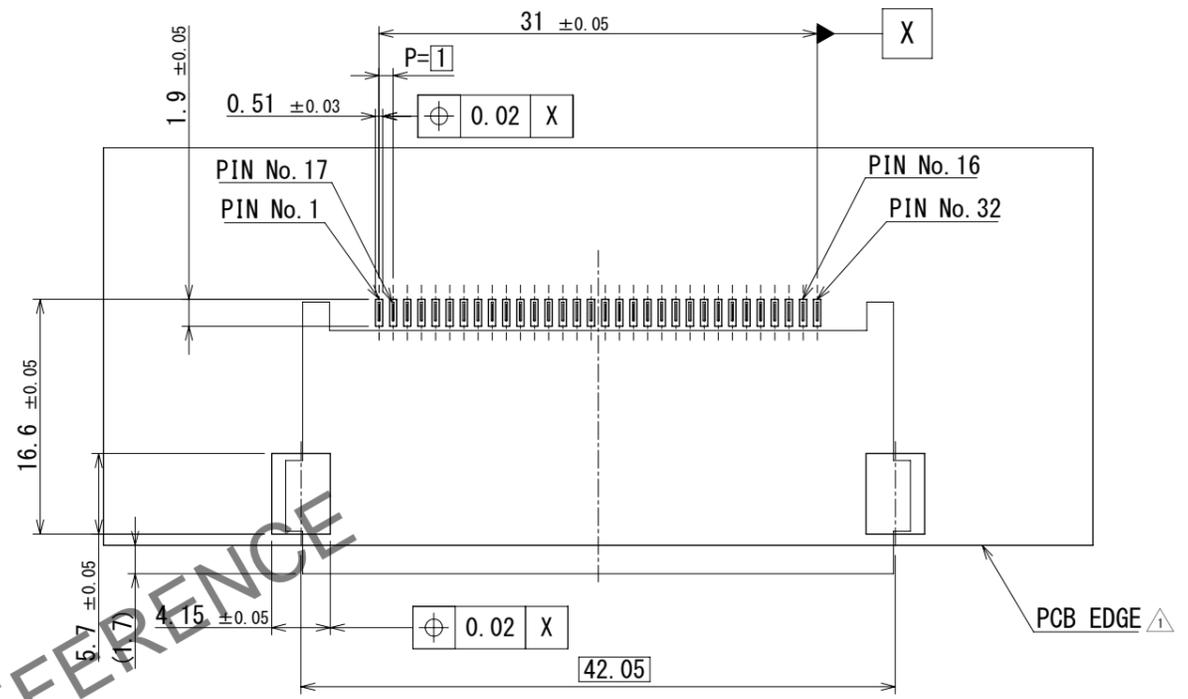


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


ELV, RoHS COMPLIANT

△ RECOMMENDED PCB PATTERN (FREE)


MATED CONNECTORS (FREE)

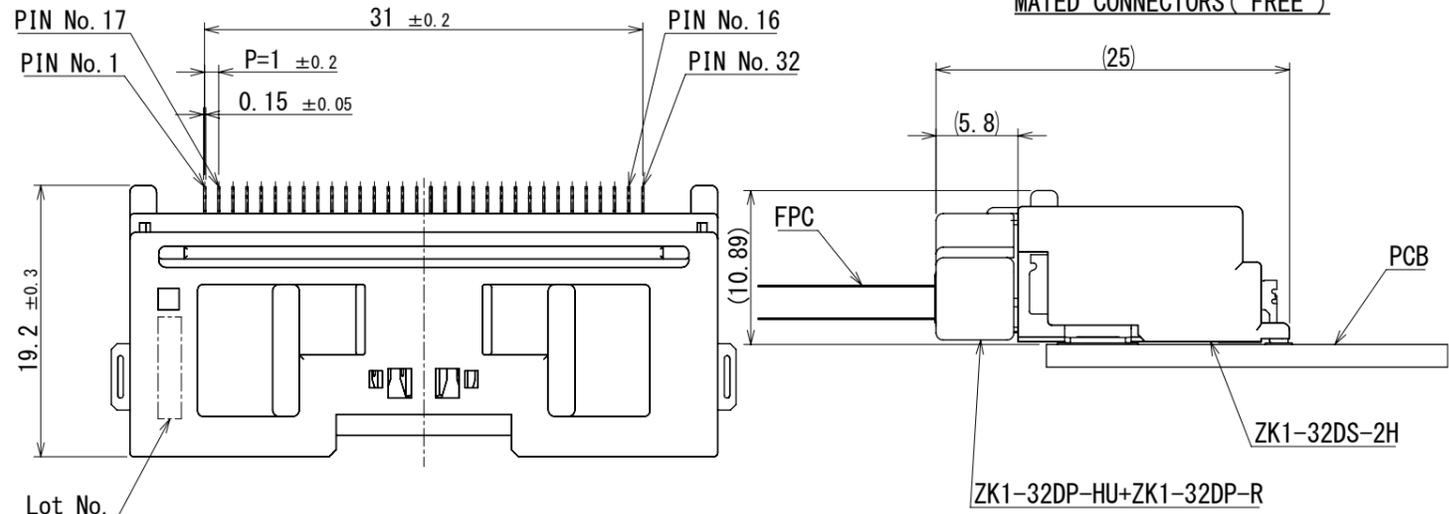

NOTE1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW
 (REFER TO RIGHT FIG.)
 USED REFLOW SYSTEM
 NO. OF CYCLES : IR IN THE AIR OR NITROGEN
 PEAK : 250°C
 OVER 230°C : 20~40s
 PREHEAT : 150~180°C
 90~120s

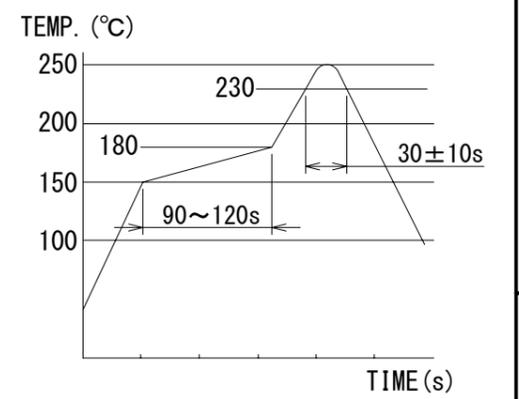

- 2. CO-PLANARITY SHALL BE 0.1mm MAX.
- 3. RECOMMENDED PCB THICKNESS IS 1.6mm.
- 4. RECOMMENDED SOLDER THICKNESS IS 0.15mm.
- △ 5. PLEASE REFER TO GUIDELINE ETAD-T1037-00 BEFORE USE.

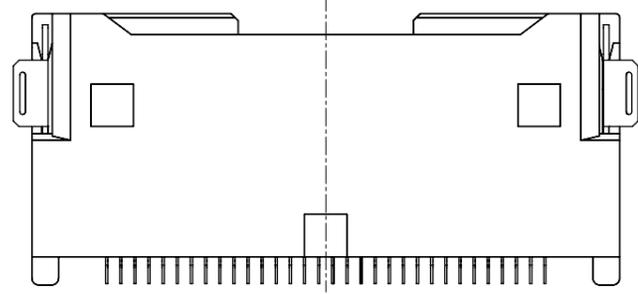

4	BRASS	SURFACE : TIN PLATING 1 μm MIN UNDER : NICKEL PLATING 1 μm MIN			
3	COPPER ALLOY	CONTACT AREA : Au PLATING 0.1 μm MIN LEAD : Au PLATING 0.05 μm MIN UNDER : NICKEL PLATING 1 μm MIN	7	PS	
2	COPPER ALLOY		6	POLYESTER	
1	PA	BLACK	5	POLYSTYRENE	
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS



UNITS mm		SCALE 2:1	COUNT 4	DESCRIPTION OF REVISIONS DIS-T-00021251	DESIGNED INYONG KIM	CHECKED TY. MOGI	DATE 2024. 06. 23
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : AH. EDASHIGE 2023. 10. 17	DRAWING NO. EDC-397751-00-00				
		CHECKED : HH. TSUKUMO 2023. 10. 16	PART NO. ZK1-32DS-2H				
		DESIGNED : TS. SHIMIZU 2023. 10. 16	CODE NO. CL0755-2100-0-00				
		DRAWN : MA. TAGUCHI 2023. 10. 16					

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

PACKING STYLE (FREE)


REEL DIMENSION (FREE)

PACKING STYLE DRAWING

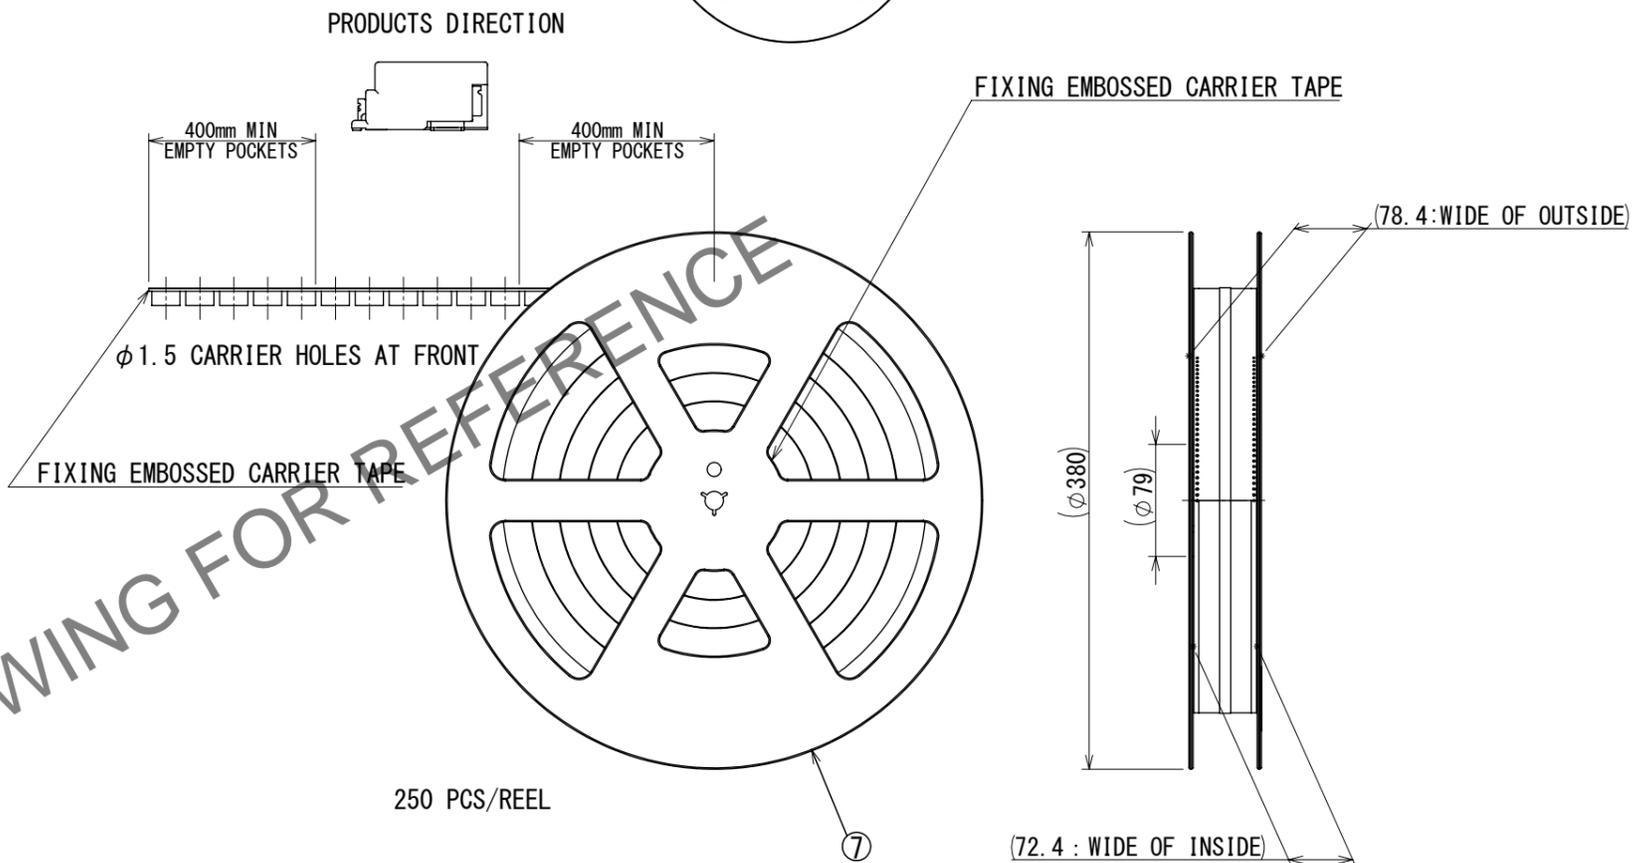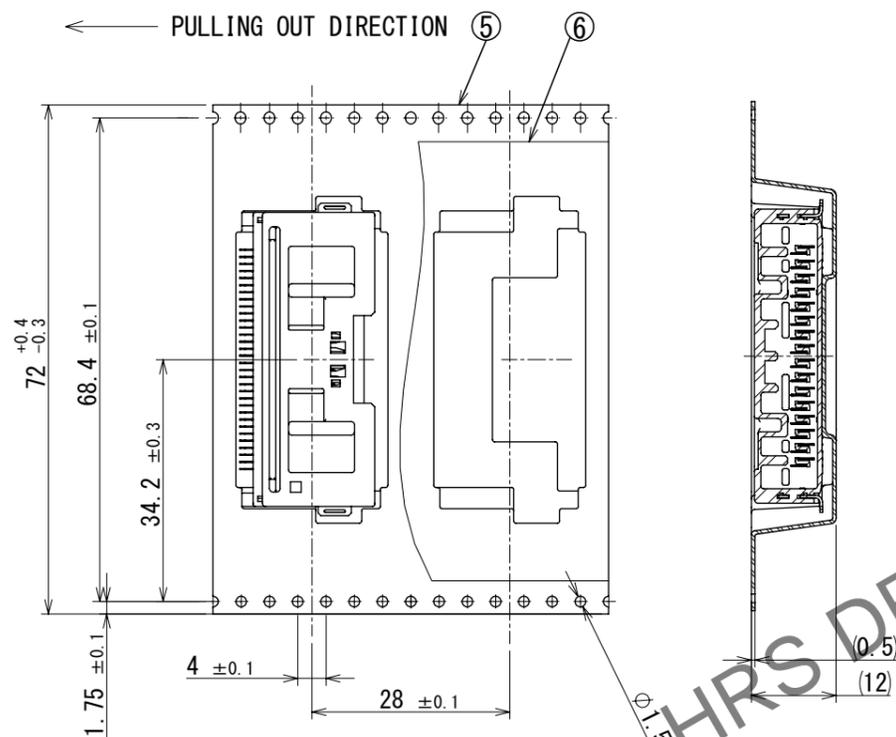

CARDBOARD DIMENSION

W= (405) (mm)
 D= (405) (mm)
 H= (80) (mm)

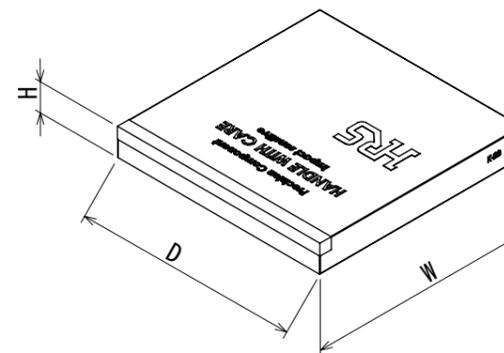

△ Frame change

HRS	DRAWING NO.	EDC-397751-00-00	2/2
	PART NO.	ZK1-32DS-2H	
	CODE NO.	CL0755-2100-0-00	
	NO.		